



MPH 25(MHPO25)

High Voltage High Current, High RF Power Capacitors


Features

- Capacitance Range: 1pF to 2700pF
- High Q Low ESR/ESL
- High RF Power
- Ultra Stable Performance
- Operating Voltages
 - DC Voltage: 300Vdc to 2500Vdc
 - RF Voltage: 200Vrms to 1800Vrms
- RF Current Rating 6A rms
- Available with Encapsulation Option

Applications

- MRI Coils
- HF/RF Power Amplifiers
- Plasma Chambers
- Antenna Tuning
- High Power RF Transmitters
- Inductive Heating
- Semiconductor Equipment

AFM Part Number Code

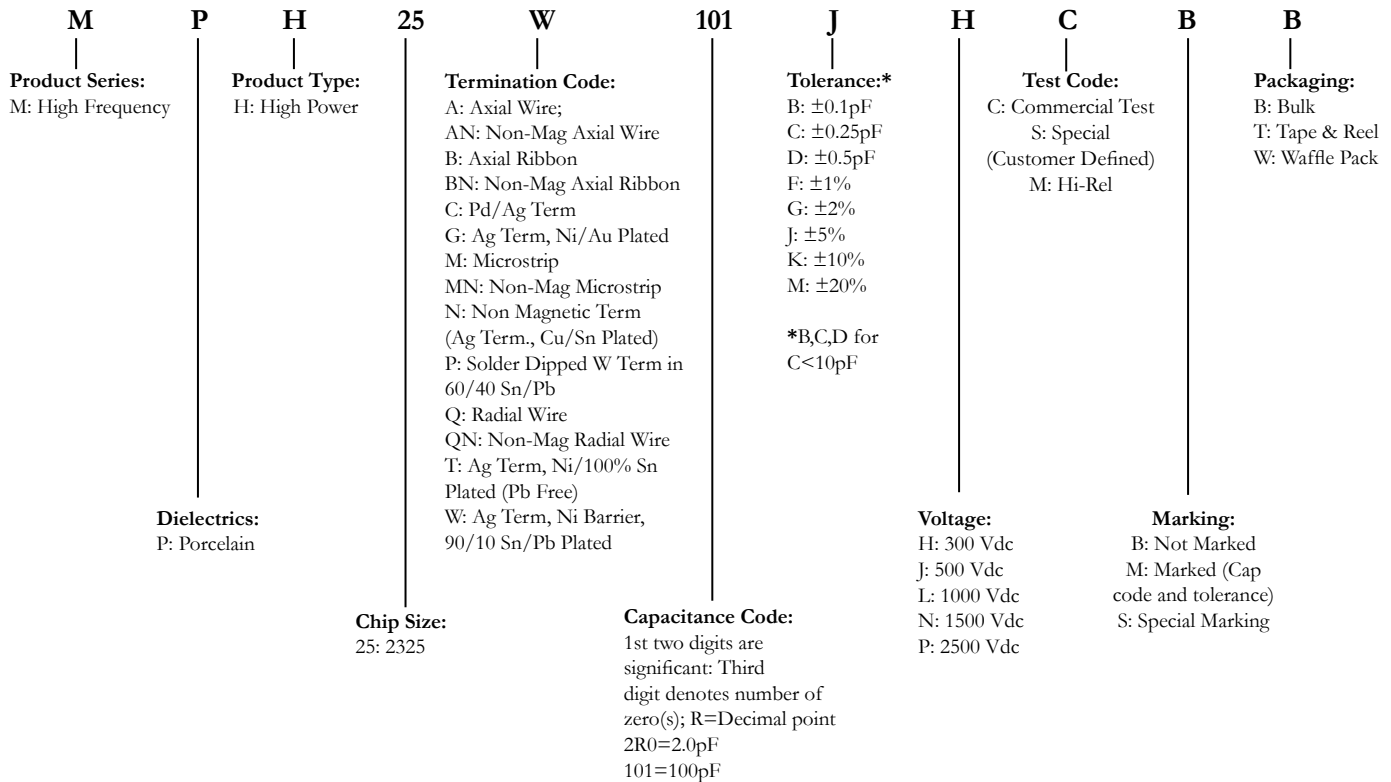

Standard Capacitance Values

Cap. Code	Cap. pF	Tol.	WVDC V	Cap Code	Cap. pF	Tol.	WVDC V	Cap Code	Cap. pF	Tol.	WVDC V
1R0	1.0	B, C, D	2500	180	18	F, G, J, K, M	2500	331	330	F, G, J, K, M	1500
1R2	1.2			220	22			391	390		
1R5	1.5			270	27			471	470		
1R8	1.8			330	33			561	560		1000
2R2	2.2			390	39			681	680		
2R7	2.7			470	47			821	820		
3R3	3.3			560	56			102	1000		500
3R9	3.9			680	68			122	1200		
4R7	4.7			820	82			152	1500		
5R6	5.6			101	100			182	1800		300
6R8	6.8	121	120	222	2200						
8R2	8.2	151	150	272	2700						
100	10	F, G, J, K, M		181	180						
120	12			221	220						
150	15			271	270						

* Special capacitance, tolerances and WVDC are available, please consult with AFM.


Specification and Performance

Piezoelectric and Aging Effect:	None
Temperature Range:	-55°C to +125°C
Temperature Coefficient of Capacitance:	+90±20ppm/°C
Quality Factor (Q) :	>10,000 (1pF~1000pF) at 1MHz >10,000 (1100pF~2700pF) at 1KHz
Insulation Resistance (IR, at Rated Voltage):	10 ⁵ MΩ min. at +25°C at rated WVDC 10 ⁴ MΩ min. at +125°C at rated WVDC
Dielectric Withstand Voltage (DWV):	1pF~470pF: 120% of rated WVDC for 5 secs; 560pF~1200pF: 150% of rated WVDC for 5 secs; 1500pF~2700pF: 250% of rated WVDC for 5 secs;
Capacitance Drift:	±0.02% or ±0.02pF, whichever is greater





MPH 25(MHPO25)


High Voltage High Current, High RF Power Capacitors

Chip Dimensions

Termination	Outline	Lin (mm)	W in (mm)	T in (mm)		B in (mm)
				min	max	
MPH25C, MPH25G, MPH25N, MPH25T, MPH25W		.230 +.020~- .010 (5.84 +0.51~- 0.25))	.250±.015 (6.35±0.38)	.138 (3.50)	.165 (4.19)	.040 (1.02) max
MPH25P		230 +.070~- .010 (5.84 +1.78~-0.25)				

Lead Options

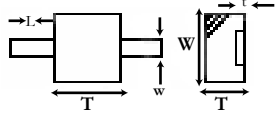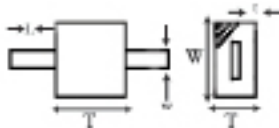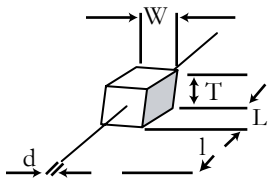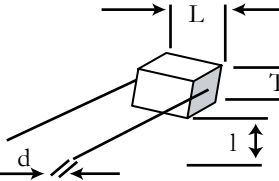Term Code	Type	Outline	Dimensions in (mm)				Lead Style Designation	
			Add .070 inches (1.77mm) if Encapsulated					
			L	W	T	d		
M/MN	Microstrip/ Non-Magnetic		.245±.025 (6.22±0.64)	.250±.015 (6.35±0.38)	.145(3.68) Max for C≤680pF		1. Silver Braced leads attached for 99.9% Silver Leads l: .500(12.7)min W: .240±.005 (6.10±0.127) t: .010±.001 (0.25±0.025)	
B/BN	Axial Ribbon/Non-Magneti				.165(4.19) Max for C>680pF			.024 (.61) Dia. Nominal
A/AN	Axial Wire/ Non-Magneti		.245±.025 (6.22±0.64)	.250±.015 (6.35±0.38)	.145(3.68) Max for C≤680pF	Solder Coated Copper l: .500(12.7)min d: .024±.002 (0.610±0.051)		
Q/QN	Radial Wire/ Non-Magneti				.165(4.19) Max for C>680pF		Leads Attached with High Melting Temperature Solder Alloy	

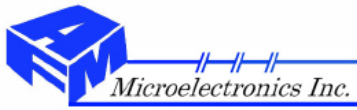

MPH 25(MHPO25)

High Voltage High Current, High RF Power Capacitors


Environmental Tests

MPH25 Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.


Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: shall be not less than 30% the initial value Capacitance Change: no more than 0.5% or 0.5pF	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature (-55°C and +125°C) stay 30 minutes, the time of removing shall be not more than 3 minutes. Perform the five cycles.
Moisture Resistance		MIL-STD-202, Method 106
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance Change: no more than 0.3% or 0.3pF	MIL-STD-202, Method 103, Condition A, with 1.5 volts D.C. applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.
Life	IR: shall be not less than 30% the initial value Capacitance Change: no more than 0.2%	MIL-Std-202, Method 108, for 2000 hours, at 125°C. no less than 1500V, 120% Rated voltage D.C. applied; less than 1500V, 150% rated voltage D.C. applied.

Performance Curve

ESR vs.Capacitance

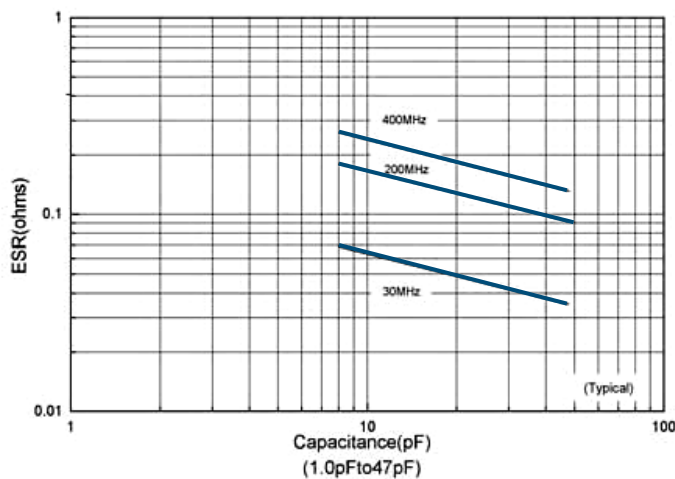


ESR vs.Capacitance

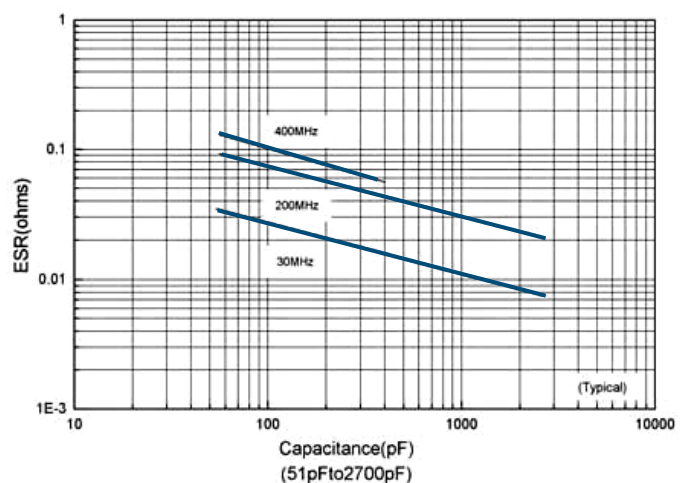


MPH 25(MHPO25)

High Voltage High Current, High RF Power Capacitors


Q vs.Capacitance

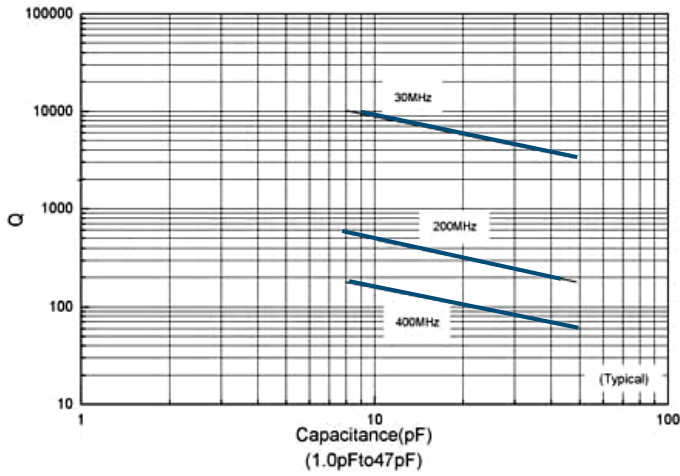

Q vs.Capacitance

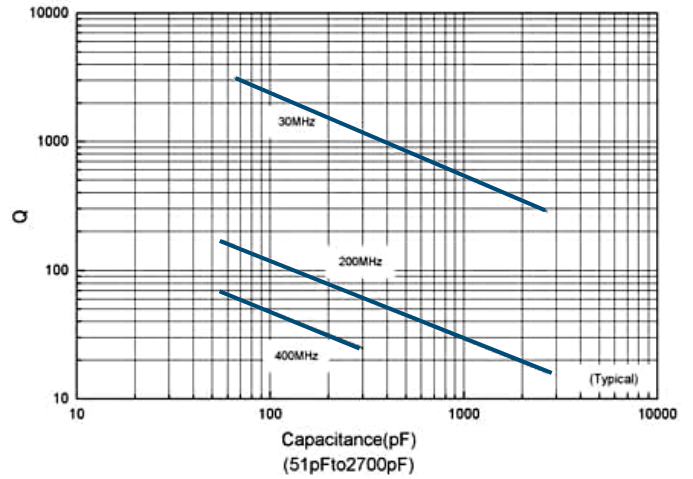

Resonance vs.Capacitance

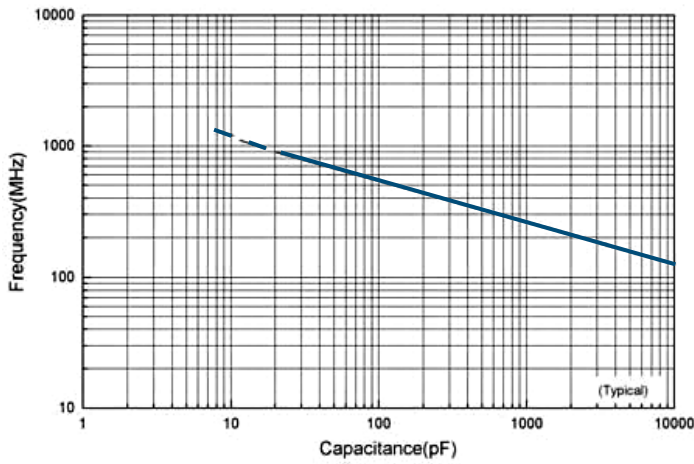

Current Rating vs.Capacitance

